


Universal Series



Double flush mounting wall boxes, Universal series

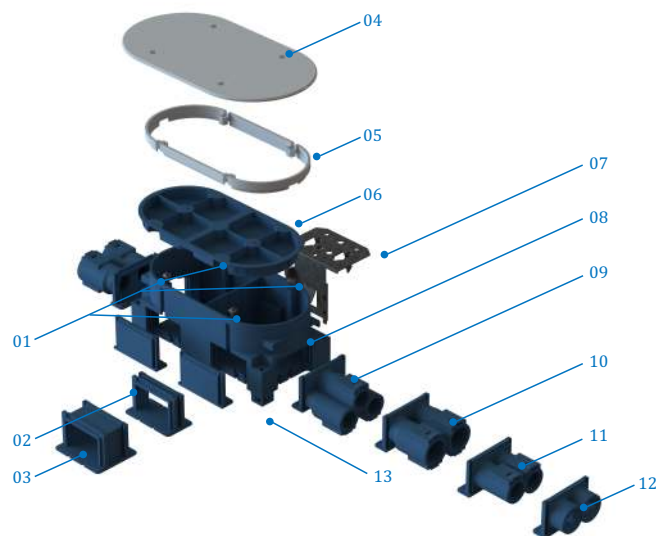

- 01 Fixing Centre-c 60mm and M3 screws, 71 mm gang distance
- 02 ETM332s constructed for c-c distance of 71 mm between the boxes
- 03 ETM333S for c-c distance of 84 mm
- 04 Cover
- 05 Extension ring, H=6mm. It can be stacked to height of 12,24mm
- 06 Plastic lid inclusive
- 07 Steel fastening plate, steel plate for fastening directly to wooden stanchions or with screws to steel stanchions
- 08 For single (12-13mm) or double (24-26mm) gypsum plates
- 09 Triangle extension, with 3xØ16mm entries, with locking springs and sealing plugs
- 10 Double extension, with two combined Ø16/20mm Conduit entries, with locking springs and sealing plugs
- 11 Double extension, with 2xØ16mm entries, with locking springs and sealing plugs
- 12 Coupling bushes with tension reliefs for MMJ and EKK cables. 3G1.5mm² and 3G2.5mm² the outside diameters for those two are 9mm and 10mm
- 13 It can be used to fix wall boxes into wooden stanchions with 3.5*3.5 square nail

Universal Series



Double flush mounting wall boxes for accessories, 60mm

Main material: PP, halogen free

Colour: Blue

IP-Class: IP20

Fire hazard test: 850°C (IEC60695-2-11)

The product is in conformity with the provisions of the following European directive(s): LVD, RoHS, WEEE

Certificate(s): CE

The product complies with the standard(s):

IEC 60670-1

Technical info:

For single (12-13mm) or double (24-26mm) gypsum plates.

71*142mm depth 60mm.

Modular system: Boxes can be ganged in comprehensive accessories.

One side with 2-way compatible Ø 20mm or Ø 16mm conduit entries, with locking springs and sealing plugs.

Another side with 3-way Ø 16mm conduit entries, with locking springs and sealing plugs
Plastic lid inclusive.


Boxes can be connected with single, one and half or another double box by use of different connecting pieces: ETM332s constructed for c-c distance of 71 mm between the boxes and ETM333S for c-c distance of 84 mm.

With or without steel fastening plate, steel plate for fastening directly to wooden stanchions or with screws to steel stanchions.

Fixing centre c-c 60mm and M3 screws, 71 mm gang distance.

Working temperature: -25°C to +60°C

Installation temperature: -5°C to +25°C



Type designation:

Type	Description/Remark
ETM638S	Without steel plate, for single wall plate, with 2 combined 16/20mm inlets and 3x16mm inlets
ETM639S	Without steel plate, for double wall plate, with 2 combined 16/20mm inlets and 3x16mm inlets
ETM610S	W/steelplate for single wall plate, with 2 combined 16/20mm inlets and 3x16mm inlets
ETM611S	W/steelplate for double wall plate, with 2 combined 16/20mm inlets and 3x16mm inlets


Universal Series




Drawing:



ETM638S, ETM639S

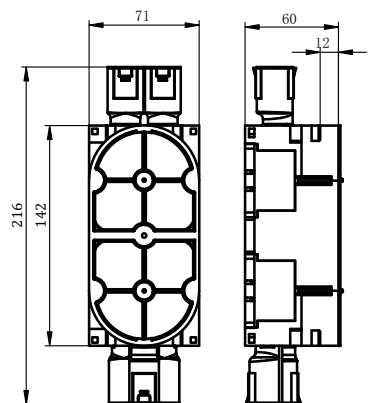


ETM638S

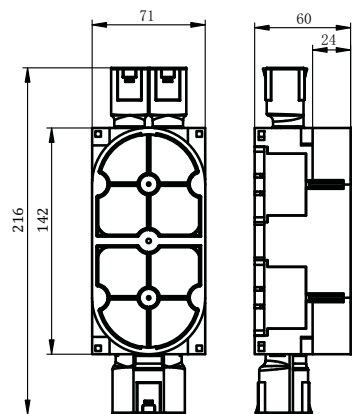

ETM639S


Universal Series

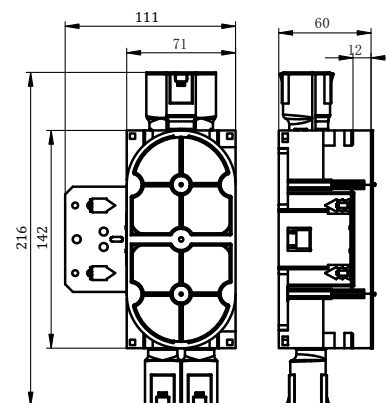

ETM610S



ETM610S, ETM611S

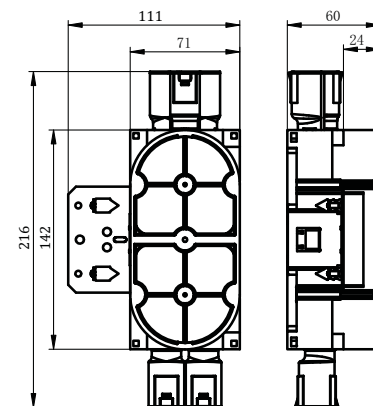

ETM611S