

Universal Series



Flush mounting wall boxes for accessories, 60mm

Colour: Blue

Main material: PP (Halogen free)

IP-Class: IP20

Fire hazard test: 850 °C (IEC60695-2-11)

The product complies with the standard(s): IEC 60670-1

The product is in conformity with the provisions of the following European directive(s):

LVD, RoHS, WEEE

Certificate(s): CE

Product information:

Box ETM680, 681S, Halogen free PP, for flush mounting in brick, concrete, Ytong, Leca and other solid materials.

Single version, connectable without special adapters, c / c 71 mm

ETM680S delivered with 1 extension mounted ETM682S - 1 × Ø16 / 20mm.

ETM681S delivered with 2 extension mounted ETM683S - 2 × Ø16 / 20mm.

Possible to mount extension ETM682S - 1 × Ø16 / 20mm or ETM683S - 2 × Ø16 / 20 on all four sides of the box.

Extensions for both 16 and 20 mm, open and provide locking springs and sealing plugs, high locking force.

The box has threaded telescopic adjustable ring (10mm) . Self-locking inner ring when tightened up the screws.

Depth of the box, minimum = 47mm, adjustable up till max 57mm depth.

The sides and bottom are fitted with 16mm knockouts.

The box comes with a transparent plastic lid that simply is knocked out with a hammer.


The box is by itself fixed in drilled hole, stays put by itself without being plastered in. Using hole saw 82mm.

Type designation:

Type	Description/Remark
ETM680S	Flush mounting box for concrete wall, with 1 single extension 16/20 mounted
ETM681S	Flush mounting box for concrete wall, with 1 double extension 16/20 mounted
ETM682S	Single extension 1x16/20
ETM683S	Double extension 2x16/20



ETM680S




ETM680S

Universal Series




Drawing:



ETM681S




ETM681S

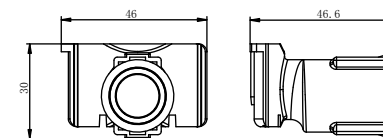

ETM682S



ETM682S

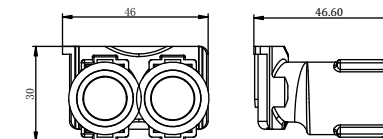

ETM683S



ETM683S

Modular system

Boxes can be ganged in comprehensive accessories

