

Simple Series



📄 Finnish outlet boxes

Colour: Yellow (box body)

Main material: PP (Halogen free)

IP-Class: Ip30

Working temperature: -25°C to +60°C

Installation temperature: -5°C to +25°C

Fire hazard test: 850°C (IEC60695-2-11)

The product is in conformity with the provisions of the following European directive(s): LVD RoHS WEEE

Certificate(s): CE, Semko

Quality management system according to: ISO 9001

Environmental management system: ISO 14001

Occupational Health and Safety Management System: ISO 45001

The product complies with the standard(s): EN 60670-1

Technical info:

Suitable for both hollow walls and concrete casting.

Diameter (mm): 71, Inside Depth/Outer height (mm): 45/48

Two or more boxes can be connected by use of different connecting pieces: ETM772S constructed for cc distance of 71 mm between the boxes.

The box has 8 screw pillars, 6 on left and right, two on up and down, with PZ1, ST2.9mm screws, c-c 60mm.

With lid (ETM750S and ETM751S).

With wings, suitable 12-13mm gypsum plate directly, possible for more places after trim the wings away.

Suitable for installation into concrete with a maximum temperature during the casting process of +90 °C.

Boxes are easy to group and install, creating an efficient platform for the installation of switches, outlets and other devices.

The mounting box can be fastened to wall studs by side nailing. Suit 3.4x3.4 nails or ST3.4 screws.

5 knock-out inlets on sides possible install related accessories of Finnish boxes from Etman and ABB.

4x Ø16mm knock-outs on the bottom possible install related accessories of Finnish boxes from Etman and ABB

Use box supports ETM773S and ETM774S secure the boxes between the boards. No further fixing of the boxes is needed; they are simply placed in their final positions when the top board layer is mounted in place.

Installation plug is used together with a screw or a nail to fasten boxes to a casting mould through the center knockout in the bottom. When the mould is disassembled, the screw or nail will follow the plywood mould and does not have to be separately removed

Simple Series




Type designation:

Type	Description/Remark
ETM750S	Outlet box without inlets
ETM751S	Outlet box with 2 inlets
ETM754S	75mm flush mounting box with 2 inlets
ETM750S.LID	LID Outlet boxes, Fit to ETM750S & ETM 751S
ST2.9x30-F-Z	Screw, 30mm, PZ1, FLAT Head
ETM755S	Outlet box with inner ring
ETM756S	Outlet box without inner ring
ETM757S	Outlet box with inner ring and 2XØ20 inlet
ETM758S	Fit ETM762S box, with ring
ETM759S	Fit ETM754S box, with ring
ETM910S	H80mm Bracket for concrete box, fit ETM754S, Red
ETM911S	H150mm Bracket for concrete box, fit ETM754S, Yellow
ETM850S	Box for concrete, with BULO, with ETM792S inlet
ETM850S-1	Box for concrete, without BULO, with ETM792S inlet
ETM851S	Box for concrete, with BULO, with ETM792S inlet
ETM851S-1	Box for concrete, without BULO, with ETM792S inlet



ETM750S.LID

Drawing:

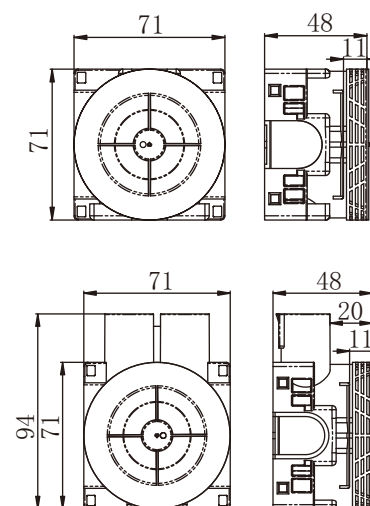

ETM750S




ETM751S




Simple Series






■ Finnish outlet boxes





ETM850S



ETM850S-1





ETM851S

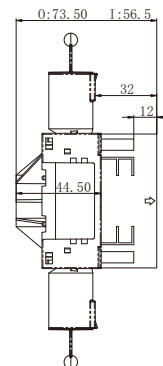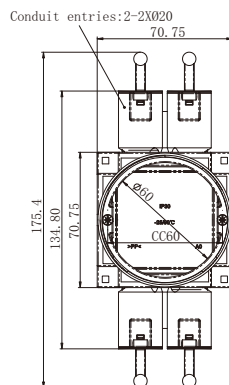

Simple Series



Conduit entries: 2-2XØ20

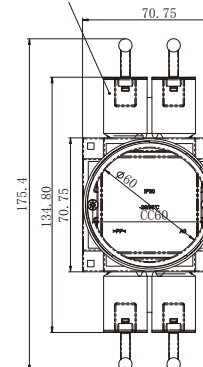

ETM851S-1