

Universal Series



2 Flush mounting roof boxes , C-C70mm for concrete, pre-fabricated house factory, universal series

Colour: Yellow (box body)

Main material: PP

IP-Class: IP30

Working temperature: -25°C to +60°C

Installation temperature: -5°C to +25°C

Fire hazard test: 850°C (IEC60695-2-11)

The product is in conformity with the provisions of the following European directive(s): LVD RoHS WEEE

Certificate(s): CE

Quality management system according to: ISO 9001

Environmental management system: ISO 14001

Occupational Health and Safety Management System: ISO 45001

The product complies with the standard(s): EN 60670-1

Technical info:

Ø83mm depth 88.5mm.

Mounting screws:M4

Distance 70mm between inside mounting screws.

Insulated material.



With 6 inlets for 20mm conduit, with locking springs and sealing plugs.

Max load 15kg.


Type designation:

Type	Description/Remark
ETM834S	6-way roofbox, without lid, CC 70mm, H=83mm
ETM837S	Roofbox 62mm, with LID mounted
ETM835S	7-way connection box, CC 67mm, with BULO
ETM835S-1	7-way connection box, CC 67mm, without BULO
ETM839S	7-way connection box, CC 67mm, with BULO, with extre ring
ETM931S	Connection box with BULO
ETM931S-1	Connection box without BULO
ETM937S	Roofbox 62mm, 6X20mm inlets
ETM852S	Roofbox 75mm, 6X20mm inlets

Drawing:

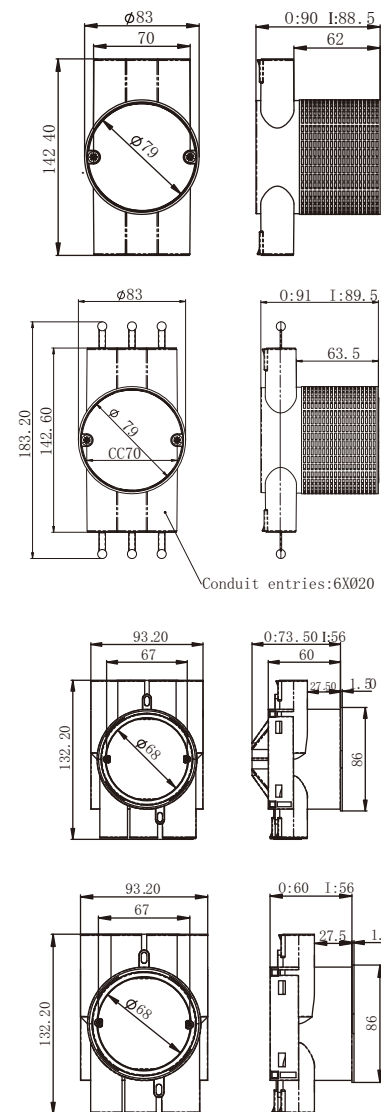

ETM834S



ETM837S



ETM835S




ETM835S-1


Universal Series




ETM839S

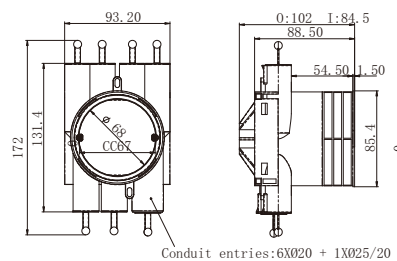



ETM931S

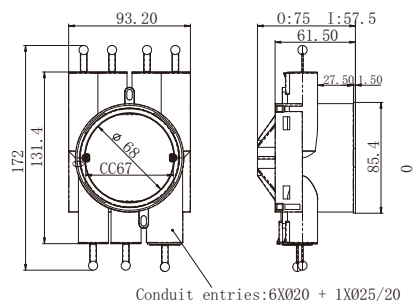



ETM931S-1

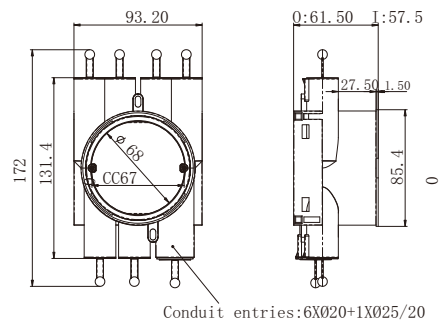

Universal Series



ETM937S



ETM852S