ETM689P-1

Floor installation box with pre-wired Perilex 16 A socket


PRODUCT DATASHEET • PERILEX 16 A RANGE • ENGLISH

Technical data

Rating	ETM420P Perilex socket: 16 A / 400/230 V~, 50 Hz, 3P + N + PE (pre-connected)
Termination / configuration	ETM420P socket + ETM689P floor junction box (max. 5 terminals)
Material & ingress protection	Halogen-free PC, glow-wire 850 °C (IEC 60695-2-11), IP20
Installation reference	96 × 150 × 52 mm; fixing c-c 60 mm (M3); for wooden floor trunking (H 12/18 mm)
Temperature & standards	Max. ambient temp.: +80 °C · Floor box EN 60670-1; Socket IEC 60884-1 / SS 428 08 34

Dimensional drawing

Dimensional drawing from 2026 Product Catalogue (p. 360). Dimensions in mm.

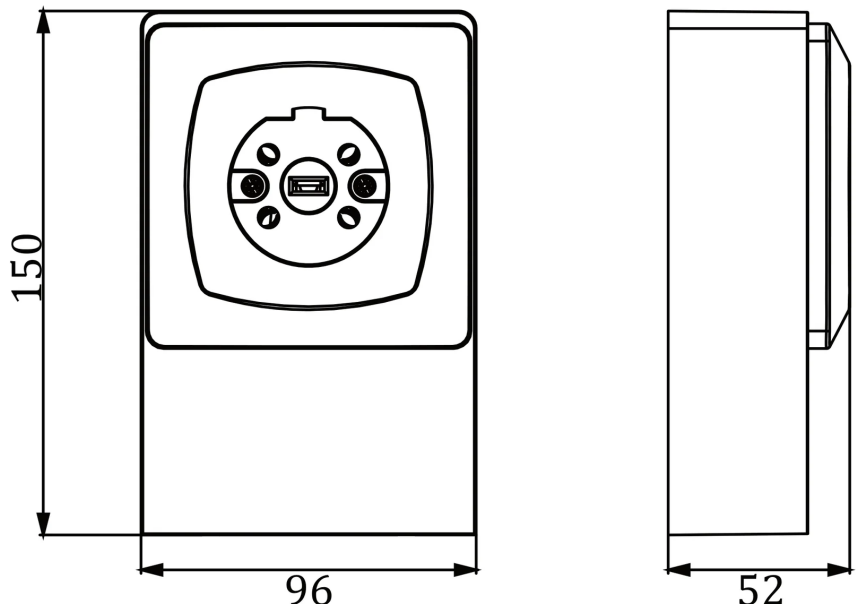

Documentation & compliance notes

Specification & drawing source: Glob-el 2026 Product Catalogue (pp. 359–360).

Constituent units: ETM420P Perilex socket (Ref. SE-S-2200808R1) pre-wired into ETM689P floor box (EN 60670-1).

Need controlled 2D/STEP drawings, Semko certificate copy or samples for ETM689P-1?
Click here to request in 10 seconds -> glob-el-box.com/request-a-quote/?product=ETM689P-1&request=documents&src=pdf