ETM689P

Surface / Floor Installation Box Body (Empty Enclosure, EN 60670-1)


PRODUCT DATASHEET • SURFACE & FLOOR BOX BODY (COMPONENT FOR ETM689P-1) • ENGLISH

Technical data

Scope & configuration	Empty surface/floor box body only (pre-wired Perilex assembly: ETM689P-1)
Fixing & cable entries	Fixing centre c-c 60 mm (M3 screws); 2 × Ø16/20 mm cable cut-outs in bottom
Material & ingress protection	Halogen-free PC, RAL 9016 Traffic White, glow-wire 850 °C (IEC 60695-2-11), IP20
Installation reference	96 × 150 × 52 mm; fits wooden floor cable trunkings (H 12/18 mm, W 44.5–62.5 mm)
Temperature & standards	Max. ambient temp.: +80 °C · EN 60670-1; LVD 2014/35/EU, RoHS, WEEE

Dimensional drawing

Dimensional drawing from 2026 Product Catalogue (pp. 64, 179, 360). Dimensions in mm.

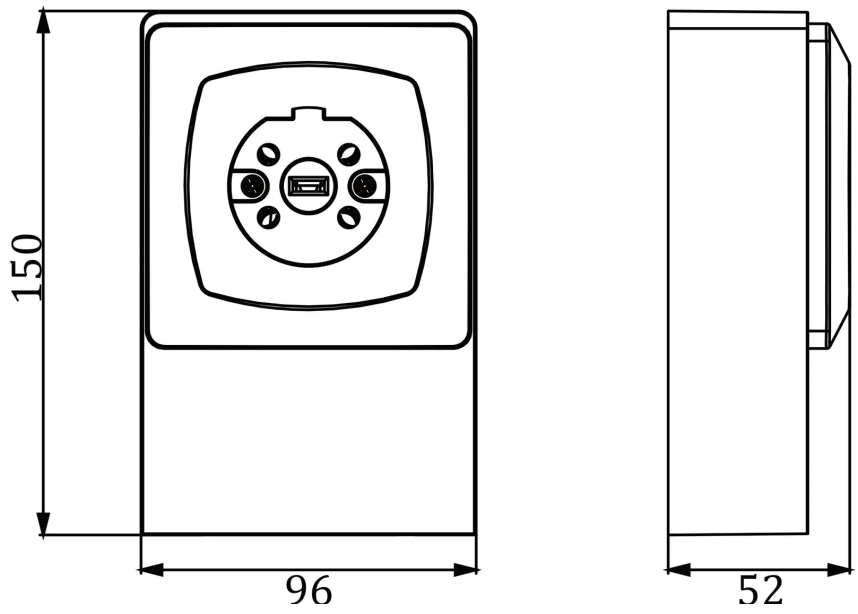

Component scope & documentation notes

Specification & drawing source: Glob-el 2026 Product Catalogue (PDF01 pp. 64, 179; Perilex section p. 360).

Distinction: ETM689P is the empty box body (EN 60670-1); ETM689P-1 includes pre-wired ETM420P Perilex socket.

Need controlled 2D/STEP drawings, Semko certificate copy or samples for ETM689P?
Click here to request in 10 seconds -> glob-el-box.com/request-a-quote/?product=ETM689P&request=documents&src=pdf