


Universal Series



Flush mounting Roof box, c-c 70mm

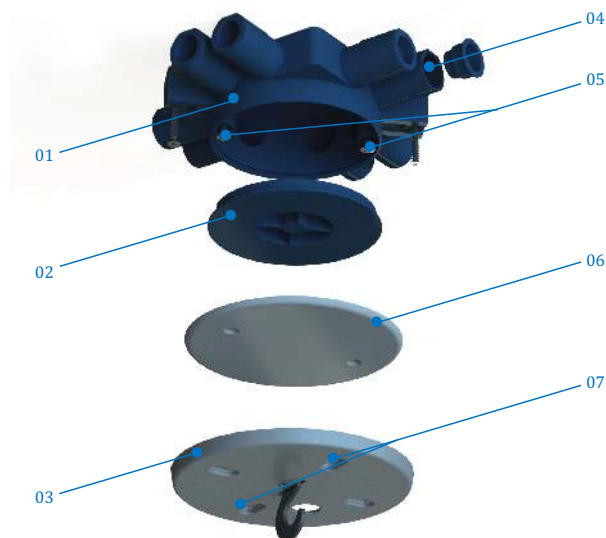

- 01 For single (12-13mm) or double (24-26mm) gypsum plates
- 02 Plastic lid inclusive
- 03 Adjustable centre distance 59-71mm, screws: M3
- 04 The box has 8 conduit entries: 8 X Ø 16 mm, locking springs, sealing plugs and plastic lid is included. Possible to enter 20 mm Ø conduit by use Ø 20 mm sleeve ETM238S on the outside of the entries
- 05 Mounting screws: M4.Distance 70 mm between inside mounting screws. Max load 15 kg
- 06 Cover
- 07 Cover, with hook, max load 15kg

Universal Series



Flush mounting roof boxes

Main material: HDPE

IP-Class: IP20

Fire hazard test: 850°C (IEC60695-2-11)

The product is in conformity with the provisions of the following European directive(s):

LVD, RoHS, WEEE

Certificate(s):

Semko, CE

The product complies with the standard(s):

IEC 60670-1

Technical info:

Ø82mm depth 32mm-40mm.

Mounting screws: M4.

Distance 70 mm between inside mounting screws.

The box has 8 conduit entries: 8 X Ø16 mm, locking springs, sealing plugs and plastic lid are included. Possible to enter Ø20 mm conduit by using of Ø20 mm sleeve ETM238S on the outer of the entries.

Plastic lid inclusive.


Max load 15 kg.

Working temperature: -25°C to +60°C

Installation temperature: -5°C to +25°C

Type designation:

Type	Description/Remark
ETM002S	8-way roof box , w/screw , H=32mm
ETM002S-2	8-way roof box , w/screw , H=45mm
ETM002S-3	8-way roof box , w/screw , H=42mm
ETM002S-4	Roof box for single gypsum, 2xØ16mm inlets, 4xØ20mm inlets, with lid and plug, H=12mm
ETM002S-5	Roof box for double gypsum, 2xØ16mm inlets, 4xØ20mm inlets, with lid and plug, H=24mm
ETM002S-6	Roof box for triple gypsum, 2xØ16mm inlets, 4xØ20mm inlets, with lid and plug, H=36mm
ETM002S-7	Roof box for special single 10mm gypsum & 36mm wood, 2xØ16mm inlets, 4xØ20mm inlets, with lid and plug, H=46mm
ETM002S-8	Roof box for special single 10mm gypsum & 48mm wood, 2xØ16mm inlets, 4xØ20mm inlets, with lid and plug, H=58mm
ETM648S	Roof box inlet, used for ETM002S roof box, 2xØ16mm inlets, 2xØ20mm inlets, with lid and Conversion plug
ETM002S-4 Lid	Lid of boxes for concrete, flat, with rib for removal
ETM002SW-4 Lid	CC 70mm Lid for roofbox, without "tap"




Universal Series




Drawing:




ETM002S, ETM002S-2,
ETM002S-3



ETM002S




ETM002S-2




ETM002S-3


Universal Series




ETM002S-4

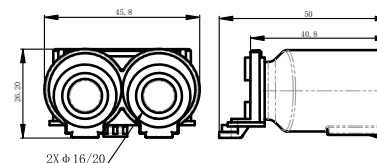

ETM648S

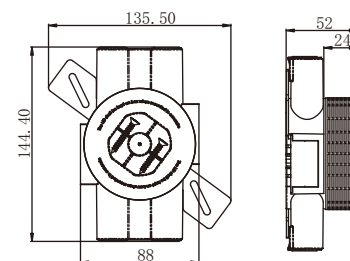

ETM002S-5

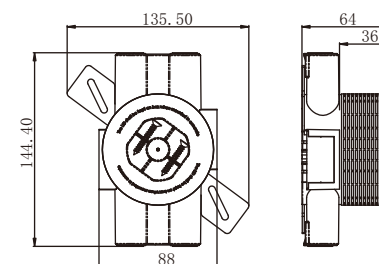

ETM002S-6

